




AQUA AURA
Leading Technologies

JetFlex® TD 90-2 Tube Diffuser


JetFlex® TD 90-2 Tube Diffuser

Dimensions


Material	Tube diameter	ID-Sleeve	Wall thickness
EPDM	87 mm	~ 90 mm	1.90 ± 0.20 mm
Silicone	87 mm	~ 90 mm	1.50 ± 0.20 mm
PUR	87 mm	~ 90 mm	0.75 ± 0.05 mm

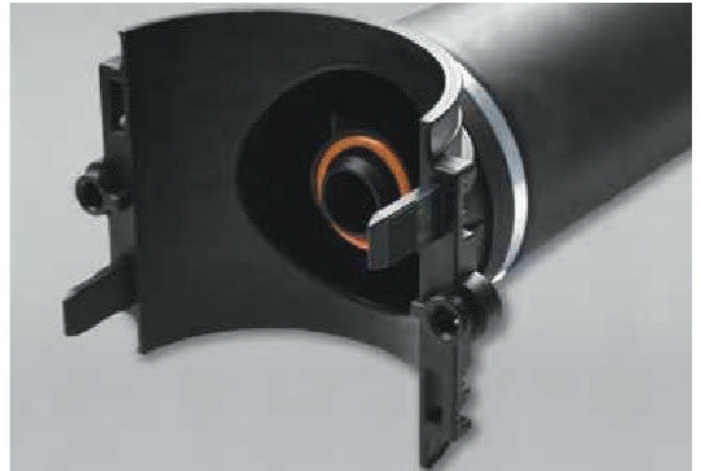

Installation drawing

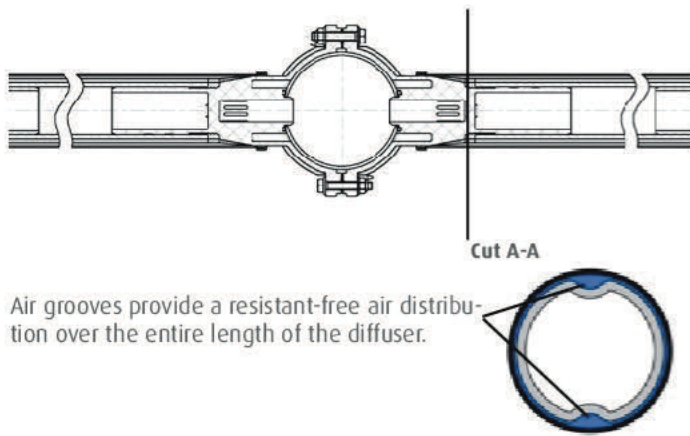

SSOTE and headloss for EPDM 1000 mm

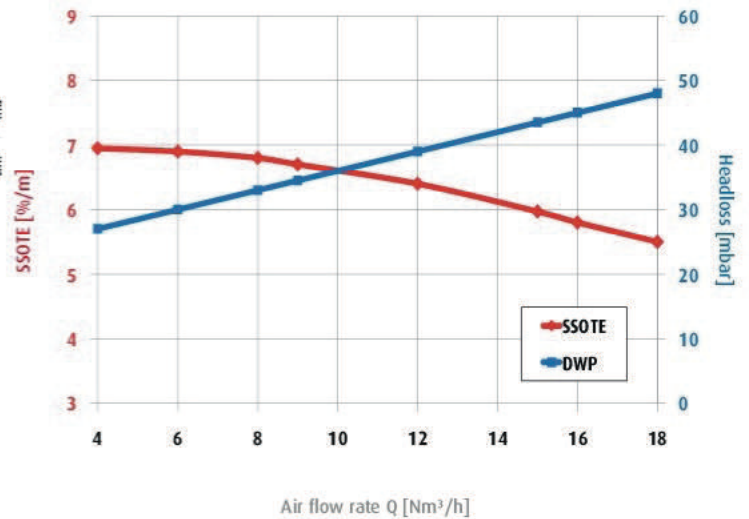

Perforation length	Total length	Perforated area	Air flow rate at standard operating conditions	Max. overload / maintenance air flow rate	Operating mode
1000 mm	1195 mm	0.24 m²	4 - 18 Nm³/h	28 Nm³/h	continuous / intermittent
750 mm	945 mm	0.18 m²	3 - 14 Nm³/h	21 Nm³/h	continuous / intermittent
500 mm	695 mm	0.12 m²	2 - 9 Nm³/h	14 Nm³/h	continuous / intermittent

Dimensions for connection to round pipes

Outer diameter	Material	Nominal diameter	Drill hole
114.3 mm	SS	100 mm	32 +0.5/-0 mm
110 mm	PVC	100 mm	32 +0.5/-0 mm

Please see our operation manuals for more details.

JetFlex® TD 90-2 Tube Diffuser

Membrane materials

Material	Techn. standard	EPDM	PUR	Techn. standard	Silicone
Colour		black	transparent		translucent
Plasticiser (%)		35	0		0
Density (g/cm³)	DIN EN ISO 1183-1	1.11	1.13	DIN EN ISO 1183-1	1.16
Tensile strength (N/mm²)	DIN 53504	>7	>45	DIN 53504	>9
Elongation at break (%)	DIN 53504	>400	>450	DIN 53504	>900
Tear strength (N/mm)	DIN EN ISO 34-1	>7.5	>35	ASTM D 624 B	>38
Hardness (Shore A)	DIN ISO 7619-1	40 ± 5	80 ± 5	DIN 53505	60 ± 5
Operating air temperature (°C)		5 - 80	5 - 60		5 - 100
Operating water temperature (°C)		5 - 40	5 - 40		5 - 40

Other materials

Support tube	SS clamp	Threaded joints
PP / PP 20% GF	1.4301	1.4301




Accessories



L-bracket and
end plug

Clamp adapter
without thread

Please see our accessories catalogue for more details.

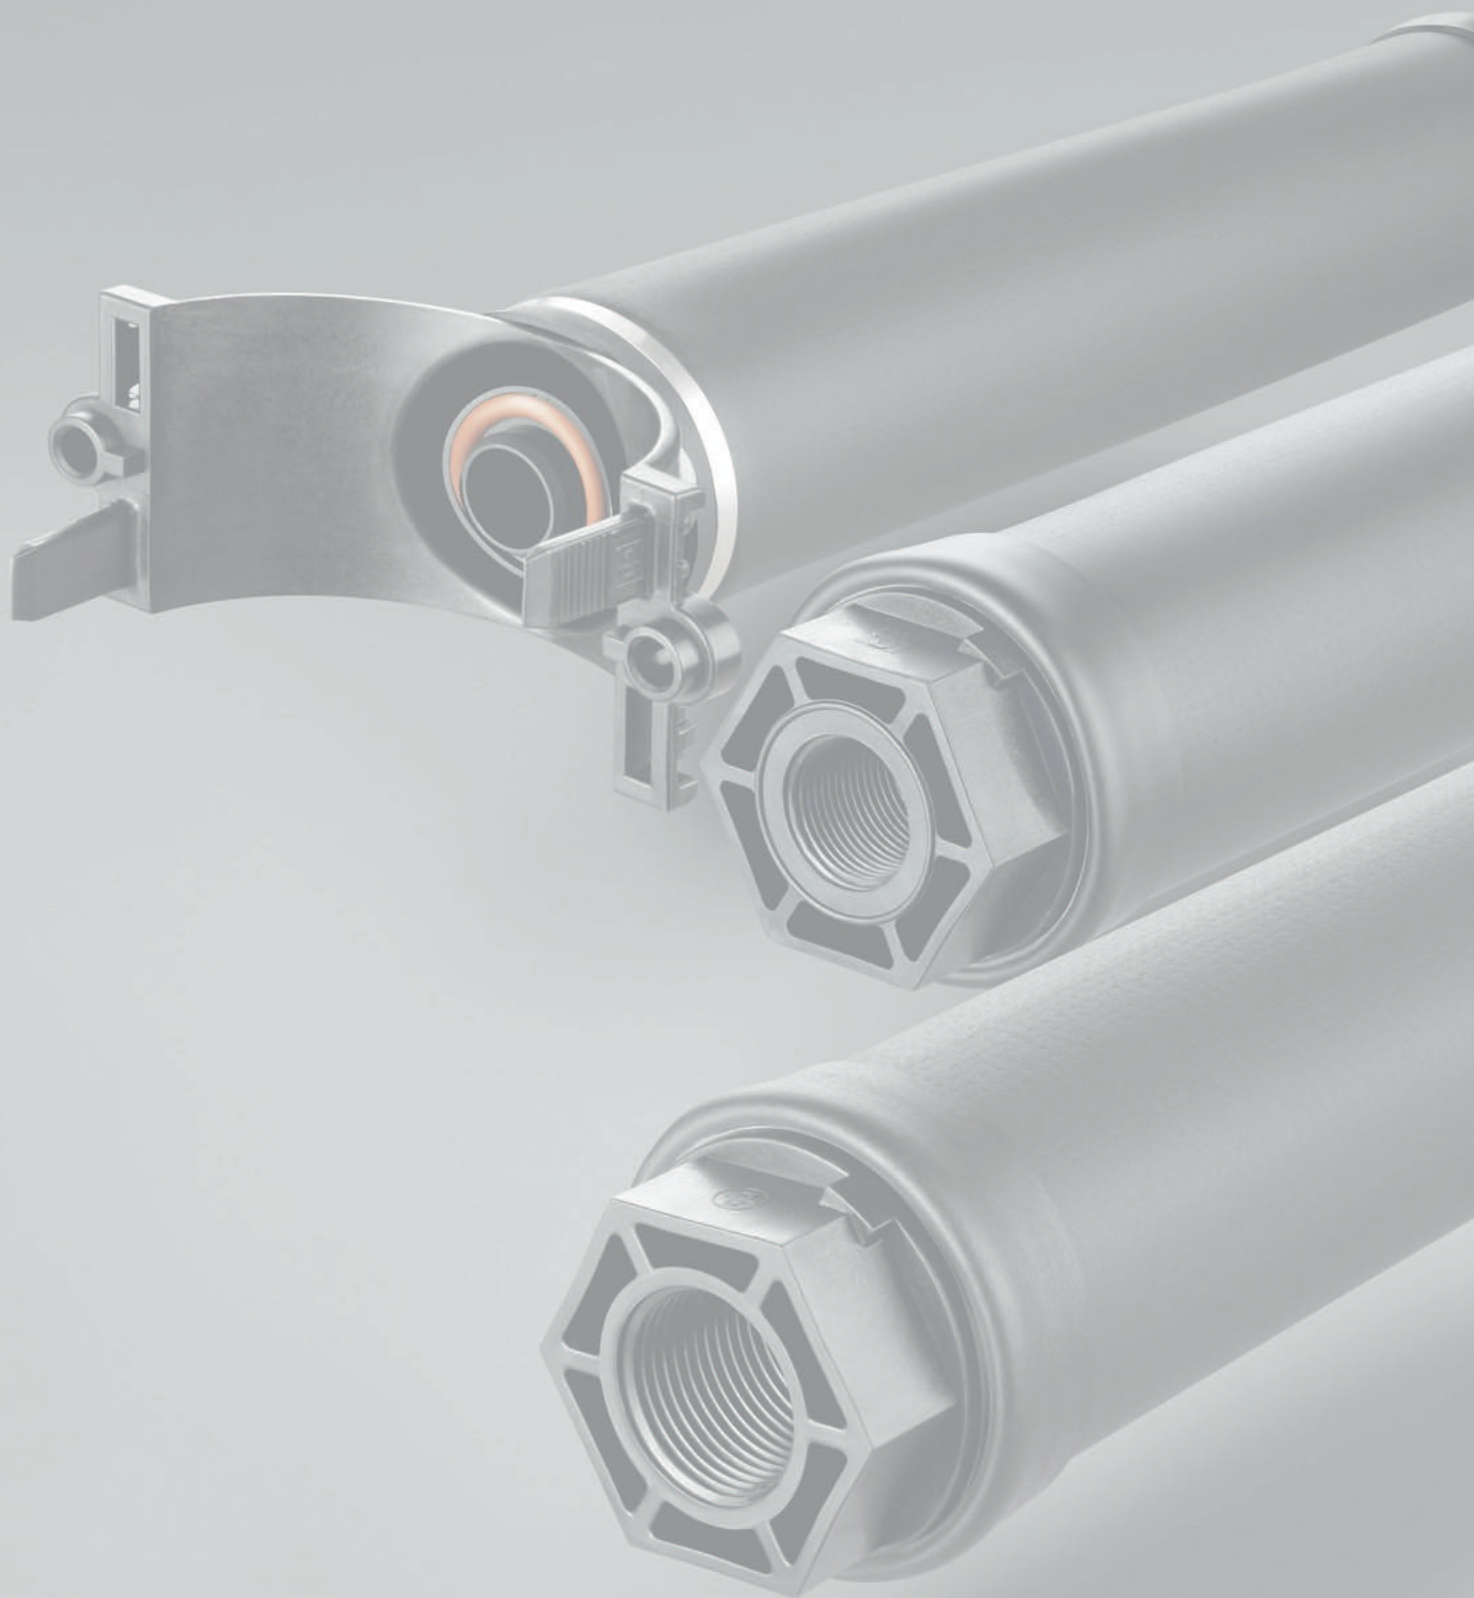

AQUA AURA
Leading Technologies

Aqua Aura Limited
info@aquaura.net
www.aquaura.net



JÄGER
Umwelt-Technik